

# HTS-9ar

Double Board Garage Fixture

# SPECIFICATIONS

**ENERGY EFFICIENT LED LIGHTING**  
70 to 400+ watt Replacement

\*UL & CUL rated, #E326977

\*Made and Assembled in North America

Distributed by: LED Canada Lights, Mississauga, Ontario

## FEATURED HIGHLIGHTS

- \*Unlimited application possibilities due to RETROFITTING
- \*Saves up to 79% of energy consumption
- \*100,000 hour lifespan 5 Yr. Manufacturers registered warranty
- \*Maintenance Free
- \*Return on Investment between 18 and 40 months
- \*Green Product

Our selection of garage fixtures are designed for low and high indoor parking garages where a wider spread of light is required with low clearance may be needed. Superior heat management provides ideal fixtures for 10+ years of maintenance free service.

## ENVIRONMENTAL FEATURES

- \*Contains no Mercury or Lead
- \*Does not produce UV Rays
- \*Does Not Attract Insects
- \*Directional Light means No Light Pollution

## ELECTRICAL SPECIFICATIONS

- \*47 to 63 Hertz ac line power voltage from 90 VAC RMS to 277 VAC RMS
- \*available to 480 VAC
- \*nominal operating efficiency is 85% typical at 230VAC and maximum load
- \*Driver provides surge protection at 305 VAC
- \*Power distributed to onboard drivers per six LED lights

## OUTPUT SPECIFICATIONS


- \*Cree Inc XP-G XLamp LED
- \*Number of Lights 12, 24, 36.
- \*Source Power 33 - 88 watts
- \*CRI 74
- \*Lumens 2500 - 7500

Let us know your clearance height and light requirements and we will help you make the right choice for your application.

## ASSEMBLY

- \*Metal Core Boards
- \*One piece aluminum heat sink dissipates heat
- \*Vibration resistant
- \*ASTM and NEMA Tested
- \*EMC: Compliant to 47 CFR, Part 2, 15

## Fixtures and Dimensions

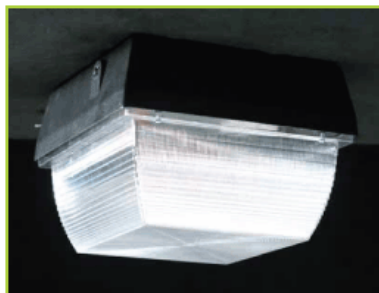

12"x 12" x 9" High

## APPLICATIONS

- \*Low Clearance Garages
- \*High Clearance Garages
- \*Gas Station Canopies
- Custom Order